

High Speed Jig Grinding Air Turbine Spindle

PLANET

Ultra-high-Speed & Super-Precision



About PLANET

Features



- A milling machine turns into a jig grinder by simply attaching a boring head available on the market and PLANET.
- If PLANET is mounted on a bench lathe, this grinder can be used as a precision internal grinder.
- PLANET can be used as a principal axis of an internal surface grinding device.

You can easily mount PLANET on a machine, so there is no need to buy a expensive high spec machine. If you use PLANET only when you need it, you can avoid idle time of a machine, and use a machine effectively and efficiently.

Rotation speed is 65,000min⁻¹, spindle run out is within 1μm.
Planet realize high-precision jig grinding and mold machining.


Milling machine + PLANET = Jig Grinder

Low price = No need to buy a expensive jig boring machine


Rotation speed is 65,000min⁻¹, spindle run out is within 1μm.

Using your machine effectively and efficiently = Avoiding idle time of a machine

Connection drawing

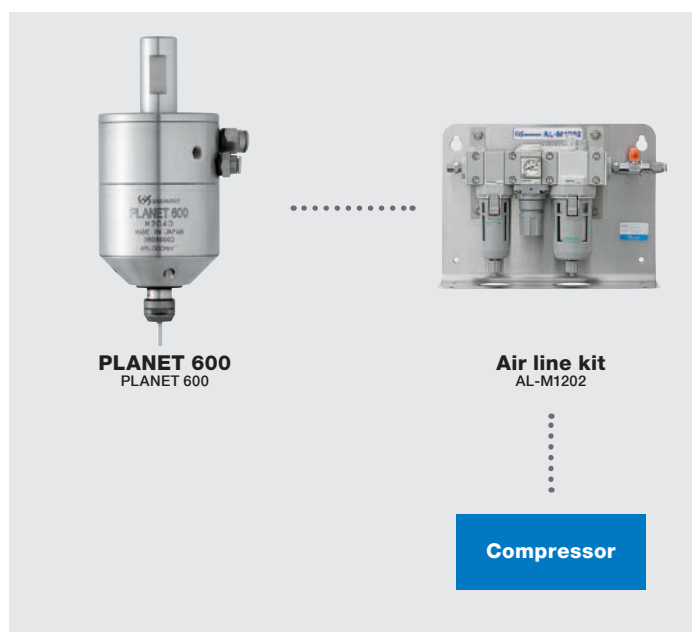

In case mounted on a lathe

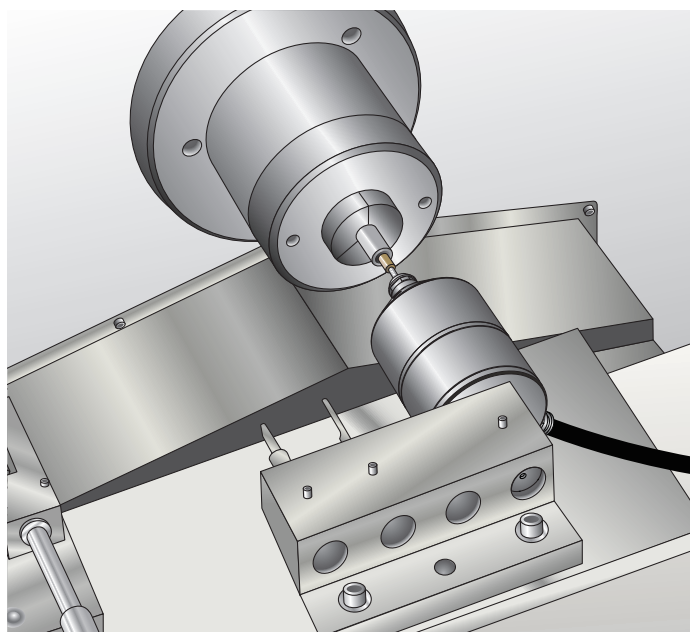

Save Your Cost

Save Your Time

Save Your Machine

Save Your Planet

Save The Planet

You can easily transform your conventional machines into high speed jig grinders with bolt-on setting.

You can also mount on lathe machines for precision internal grinding.



High Speed Jig Grinding Air Turbine Spindle

PLANET

Ultra-high-Speed & Super-Precision

High Speed Jig Grinding Air Turbine Spindle

Not Actual Size

PLANET 600



Spec. **DXF data** DXF files are available on our website

Code No.	7355	Model	PL600-M2040
Code No.	7356	Model	PL600-H3440


O.D.	Max.rpm	Spindle runout	Proper air pressure	Collet	Air Consumption
PL600-M2040 Ø20mm PL600-H3440 Ø19.05mm	65,000min ⁻¹	Within1µm	0.4MPa	CHK Group (ø0.5~ø6.35mm)	175Nℓ/min

Accessories

AL-M1202 (For $\phi 6\text{mm}$)

Air line kit


Code No.	4502	Model	AL-M1202
----------	------	-------	----------

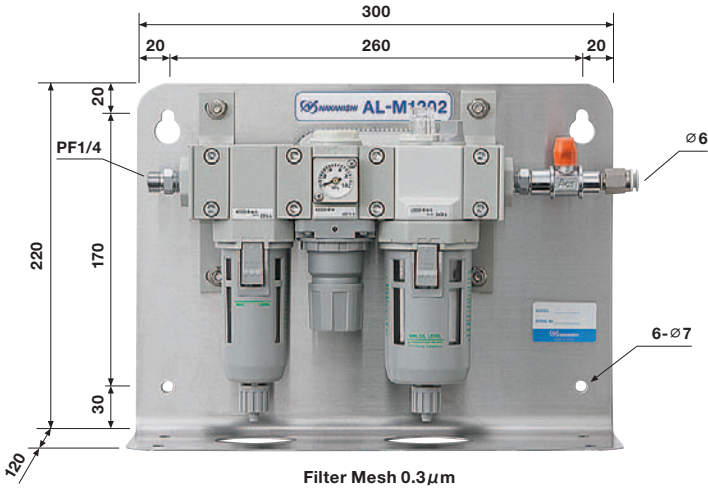

Standard Equipment Accessories	Connection Hose (K-260) : 2m / Lubricating Oil (K-211) : 1pc. / Reducer
--------------------------------	---

Collet	Code No.	Model	I.D
 Model : CHK-1.0, CHK-3.0, CHK-3.0AA, CHK-3.175, CHK-3.175AA, CHK-4.0, CHK-4.0AA, CHK-6.0, CHK-6.0AA, CHK-6.35, CHK-6.35AA  Model : Except above Collet CHK group	91592	CHK-2.35	$\phi 2.35$
	91530	CHK-3.0	$\phi 3.0$
	91593	CHK-3.175	$\phi 3.175$
	91540	CHK-4.0	$\phi 4.0$
	91560	CHK-6.0	$\phi 6.0$
	91596	CHK-6.35	$\phi 6.35$
	-	CHK-□□	$\phi 0.5, \phi 0.6, \phi 0.7, \phi 0.8, \phi 0.9$ $\phi 1.0, \phi 1.5, \phi 2.0, \phi 2.5, \phi 3.5, \phi 4.5, \phi 4.76, \phi 5.5$ $\phi 1.1, \phi 1.2, \phi 1.3, \phi 1.4, \phi 1.7, \phi 1.8, \phi 1.9$ $\phi 2.1, \phi 2.2, \phi 2.3, \phi 2.4, \phi 2.6, \phi 2.7, \phi 2.8, \phi 2.9$ $\phi 3.1, \phi 3.2, \phi 3.3, \phi 3.4, \phi 3.6, \phi 3.7, \phi 3.8, \phi 3.9$ $\phi 4.1, \phi 4.2, \phi 4.3, \phi 4.4, \phi 4.6, \phi 4.7, \phi 4.8, \phi 4.9$ $\phi 5.1, \phi 5.2, \phi 5.3, \phi 5.4, \phi 5.6, \phi 5.7, \phi 5.8, \phi 5.9$ $\phi 1.6, \phi 5.0$
	91597	CHK-3.0AA	$\phi 3.0\text{AA}^{**}$
	91598	CHK-3.175AA	$\phi 3.175\text{AA}^{**}$
	91599	CHK-4.0AA	$\phi 4.0\text{AA}^{**}$
	91600	CHK-6.0AA	$\phi 6.0\text{AA}^{**}$
	91601	CHK-6.35AA	$\phi 6.35\text{AA}^{**}$

****High precision type AA (Spindle runout within 2μm)**

Collet nut	Code No.	Model	Description
	2129	K-265	Collet nut for Collet CHK

Lubricating Oil	Code No.	Model	Description
	1057	K-211	Lubricating Oil (70cc)
	1058	K-202	Lubricating Oil (1L)



www.nakanishi-inc.com

Specifications and design are subject to change without notice.



P.A. des Forbœufs - 30, rue des Forbœufs - F-95280 Jouy-Le-Moutier
Tél. : 33 (0) 1 34 24 70 70 - Fax : 33 (0) 1 34 24 70 69
e-mail : edmservice@edmservice.com - web: www.edmservice.com